

AKUSTIK® - BAND

MATERIAL

Akustik® k -Band is the gasket resistant to noises, air, water and dust. This product made of expanded reticulated polyethylene with closed cells, density 33 Kg/m³, can be supplied single/double-sided self-adhesive. On request it is possible to package every single roll with a plastic film.

DIMENSIONS

Thickness: mm 3, 5, 10

Width: mm 15, 20, 30, 40, 50, 70, 90, ecc.

Length: mt 20 (spess. 3 mm),
mt 20 (spess. 5 mm),
mt 15 (spess. 10 mm).


FIELDS OF APPLICATION

Akustik® k -Band is widely used as gaskets for metal structures for plasterboards and moveable walls, as well as for channellings, ventilation plant and plant engineering.

INSTALLATION

Akustik® k -Band is easy to install thanks to its self-adhesive side and it can be applied to any surface provided that it is smooth and free of oil, dust and grease. Also available double-sided self-adhesive.

INSULATING TAPED MADE OF EXPANDED CROSS-LINKED POLYETHYLENE WITH CLOSED-CELL STRUCTURE

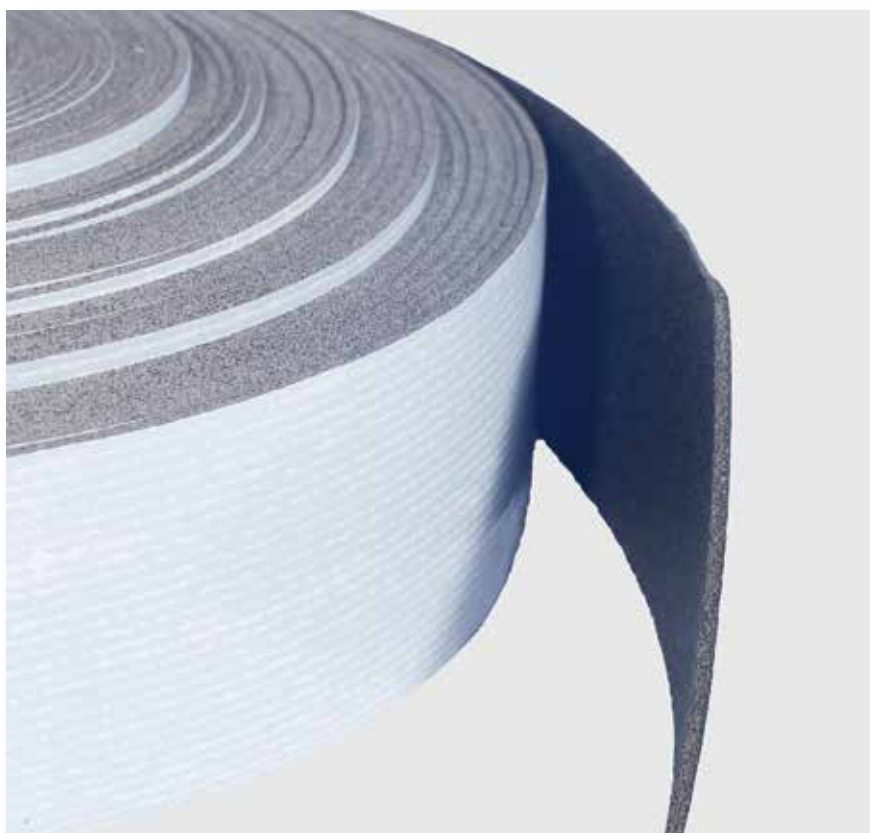

PHYSICAL PROPERTIES

- **Adhesive Acrylic** water-based
- **Color Grey** anthracite
- **Reaction to fire** CL 1 on request
- **Thermal conductivity** $\lambda = 0.035$ WmK
- **Density** 33 Kg/m³
- **Format** Rolls 20 m.
- **Resistance to temperature** - 80° C + 100° C
- **Thickness:** from 3 mm on



REACTION TO FIRE

CL 1 on request.