

# Firestone Green Roofing Systems

## Nobody covers you greener



### Firestone RubberGard® EPDM Green Roofs




Putting a garden on your roof is a great way to make better use of city space, protect the environment and save money long term. These vegetative or garden roofs - a roof area of plantings installed above a waterproofing membrane - have become very successful on rooftops around the world.

**Firestone RubberGard® EPDM** is an ideal membrane for combination with extensive green roof systems, using lightweight and low maintenance sedum vegetation. The large, seamless (up to 930 m<sup>2</sup>), lightweight and flexible EPDM membrane has successfully passed the FLL test for root penetration and can therefore provide dependable performance in a demanding roofing environment.

The benefits of the combination of a Firestone RubberGard® EPDM membrane with a green roof system are numerous:

- ✔ Increased life expectancy of the roof
- ✔ Added value and aesthetics
- ✔ Lower energy costs
- ✔ Easy installation and maintenance
- ✔ Improved air quality
- ✔ Reduction of the urban heat-island effect
- ✔ Storm water management
- ✔ Extra soundproofing and insulation
- ✔ A natural habitat for plants and birds

# Recommended build-up for extensive roofs\*

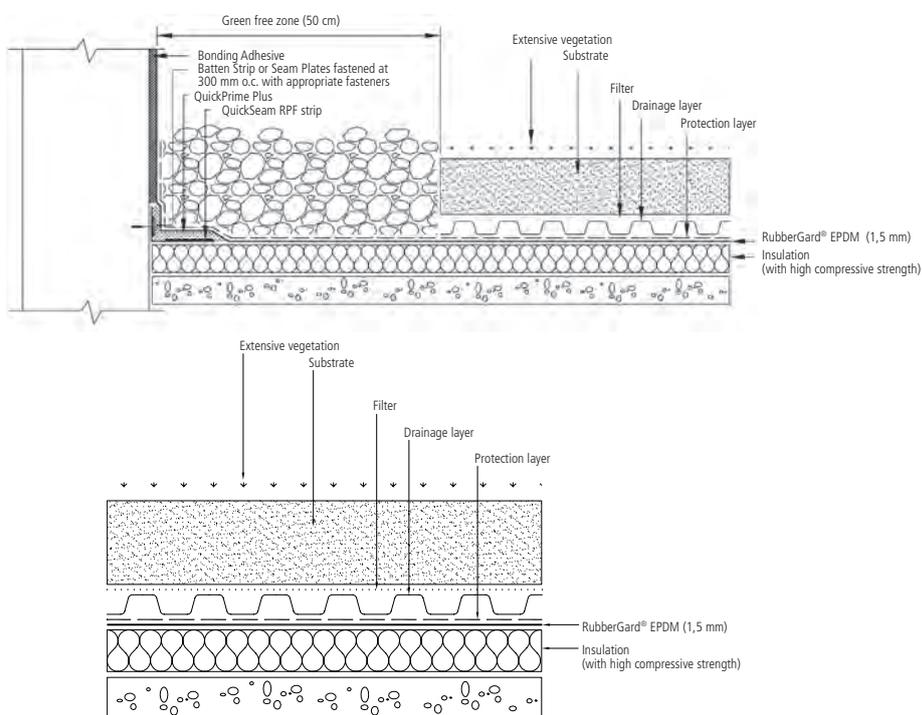

\* For other types of green roofs, please consult Firestone Technical Department.

## Firestone RubberGard® EPDM - Specifications

Product Line			
Membrane	Width in m	Length in m	Weight in kg/m <sup>2</sup>
.045" STD / 1.1 mm	2.28 - 2.75 - 3.05 - 5.08 - 6.10 - 7.62 - 9.15 - 12.20 - 15.25	15.25 - 30.50 - 45.75 - 61	1.4
.060" STD / 1.5 mm	2.28 - 2.75 - 3.05 - 6.10 - 9.15 - 12.20 - 15.25	15.25 - 30.50	1.9
Physical Properties			
Property	Test Method	Declared Value	Unit
Watertightness	EN 1928 (B)	pass	
Tensile strength (L/T)	EN 12311-2 (B)	≥ 8	N/mm <sup>2</sup>
Elongation (L/T)	EN 12311-2 (B)	≥ 300	%
Resistance to static load - soft substrate	EN 12730 (A)	≥ 25	kg
Resistance to static load - hard substrate	EN 12730 (B)	≥ 25	kg
Resistance to impact - soft substrate	EN 12691 (B)	≥ 1700	mm
Resistance to impact - hard substrate	EN 12691 (A)	≥ 200	mm
Tear resistance (L/T)	EN 12310-2	≥ 40	N
Joint peel resistance	EN 12316-2	≥ 50	N/50 mm
Joint shear resistance	EN 12317-2	≥ 200	N/50 mm
UV exposure	EN 1297	pass	
Foldability at low temperature	EN 495-5	≤ -45	°C
Resistance to root penetration	EN 13948	pass	

For latest updates and additional info please consult our website at [www.firestonebpe.com](http://www.firestonebpe.com). Testing results and/or copies of Approval Documents for above mentioned membranes are available upon request.



# Firestone

BUILDING PRODUCTS

NOBODY COVERS YOU BETTER.®

Firestone Building Products

Ikaroslaan 75 | 1930 Zaventem | Belgium

Phone +32(0)2 711 44 50 | Fax +32(0)2 721 27 18

info@fbpe.be | [www.firestonebpe.com](http://www.firestonebpe.com)